



Joh. Friedrich Behrens AG
Industrial Fastening Systems

Bogenstraße 43 - 45, 22926 Ahrensburg, Germany
Tel: + 49(0) 41 02 78 - 444
Fax + 49(0) 41 02 78 - 270
eMail: info@bea-group.com
www.bea-group.com

Variably
applicable




BeA Skater

One base for 3 tools

- Optimal results according to Eurocode 5
- Flexible and adaptable
- Quick, safe and efficient



Optional accessories



Edge guide [Art. code 14412428]



Extension handle
[Art. code
14412429]



Rail
[Art. code 14406482,
without picture]

Applications

Timber frame constructions, packaging industry, pre-fabricated housing and all other applications where plasterboard, gypsum board and wooden boards (e.g. OSB panels) are to be fitted/attached

BeA Skater base


Article code	14412430
EAN code	4045759695974

BeA Skater for heavy duty staples

Optimal for all applications with plaster/gypsum/wooden boards

Description	BeA 14/65-830C Skater	BeA 180/65-835C Skater	BeA 800 DC Skater
Article code	12000624	12000625	12000629
EAN code	4045759056843	4045759056850	4045759057437
Magazine type	Top loader		Top loader
Weight (incl. Skater)	11.8 kg		12.7 kg
Dimensions in mm	L 553 / B 345 / H 326		L 587 / B 340 / H 360
Safety system	Path controlled contact actuation		Path controlled contact actuation
Fastener type	Type 14, Type 16/155	Type 180	Type BDC
Magazine capacity	Min. 168 staple type 14 Min. 152 staple type 16/155	Min.132 staples	1 Coil
Fasteners per strip	2 x 75 staple type 14 2 x 70 staple type 16/155	2 x 60 (VZ HZ = 3 x 40)	Max 300 nails
Operating pressure	6 - 8 bar (90 - 120 psi)		6 - 8 bar (90 - 120 psi)
Max operating pressure	8 bar (120 psi)		8 bar (120 psi)
Air consumption / operation	2.9 litre / 6 bar		2.9 litre / 6 bar
Inner hose diameter	Ø 9 - 10 mm recommended		Ø 9 - 10 mm recommended
Vibration level as per ISO 8662-11 is under the declaration limit as per 2006/42 EC			
Extras supplied with the stapler:	Operating instructions, spare parts list, service instructions, allen wrenches		Operating instructions, spare parts list, service instructions

Staple Type 14 + 16/155

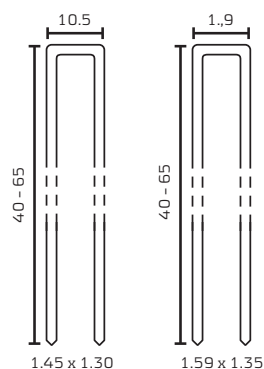


Description	L = Length
14/40 NK HZ	40 mm
14/45 NK HZ	45 mm
14/50 NK HZ	50 mm
16/40 NK HZ	40 mm
16/45 NK HZ	45 mm
16/50 NK HZ	50 mm
16/60 NK HZ	60 mm
16/65 NK HZ	65 mm
155/45 NR HZ	45 mm
155/45 VZ HZ	45 mm
155/50 VZ HZ	50 mm
155/56 VZ HZ	56 mm
155/65 VZ HZ	65 mm

Coil nails BDC

BDC nails	= wire welded coil nails
Diameter	2.5 - 3.1 mm
Length	60 - 80 mm
Material	BK = steel, bright
	NK = steel, electro galvanized
	RF = stainless steel, comparable to material 1.4301
	NR = stainless steel, comparable to material 1.4401
	FV = steel, hot dipped galvanized
Surface properties	Smooth
	Ring shank
	Screw shank
Nails heads	Flat head
	Dome head
	Pozi head
	TX head



Staple Type 180



Description	L = Length
180/40 NK HZ	40 mm
180/45 NK HZ	45 mm
180/50 NK HZ	50 mm
180/55 NK HZ	55 mm
180/60 NK HZ	60 mm
180/63 NK HZ	63 mm
180/65 NK HZ	65 mm

Staple type 155 and 180 in heavy galvanized (service class 2) and stainless steel (A4 - service class 3) are certified to DIN 14592 and have the required characteristics specified in Eurocode 5.

Further types on request, nails conforming to EN 14592 (Eurocode 5)